ROLLBLOC
DIE LOADING ARMS

ROLLBLOC Die Loading Arms CS 01/02

Swivel version, symmetric

Fixed to the press table
With locking mechanism

Type list

Load bearing capacity	Length L	Attachment height A	Order code	Loading arm dimensions E	Hole pattern B
10 kN	500 mm	195 mm	CS01/0500 F	230	80
10 kN	800 mm	195 mm	CS01/0800 F	230	80
10 kN	1000 mm	245 mm	CS01/1000 F	280	130
20 kN	500 mm	195 mm	CS02/0500 F	230	80
20 kN	800 mm	245 mm	CS02/0800 F	280	130
20 kN	1000 mm	295 mm	CS02/1000 F	330	180

See fold-in flap on left for supplementary order designation 1

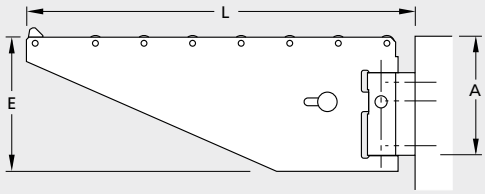

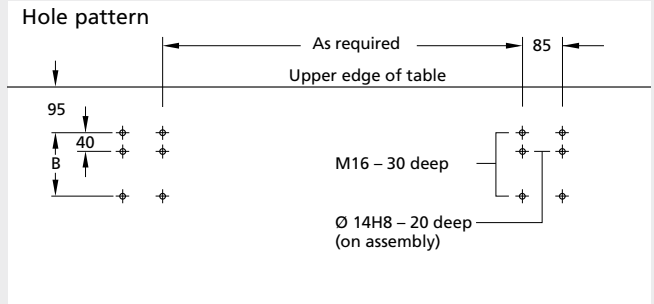

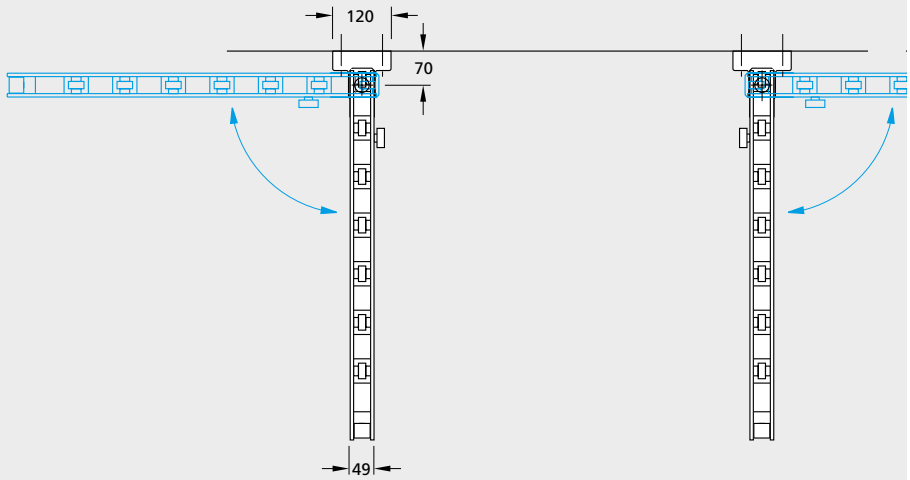

GÜTHLE
ROLLBLOC

→ FOR FIXED MOUNTING TO THE PRESS TABLE

ROLLBLOC Die Loading Arms CS 04/06

Swivel version, symmetric

Fixed to the press table
With locking mechanism

Type list

Load bearing capacity	Length L	Attachment height A	Order code		Loading arm dimensions E	Hole pattern B
40 kN	800 mm	345 mm	CS04/0800	F	400	315
40 kN	1000 mm	395 mm	CS04/1000	F	450	365
40 kN	1250 mm	445 mm	CS04/1250	F	500	415
60 kN	800 mm	445 mm	CS06/0800	F	500	415
60 kN	1000 mm	525 mm	CS06/1000	F	580	495
60 kN	1250 mm	625 mm	CS06/1250	F	680	595

See fold-in flap on left for supplementary order designation 1

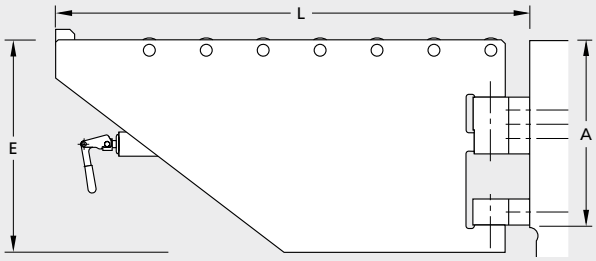

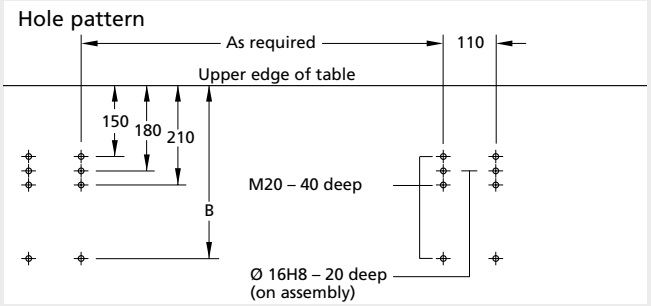

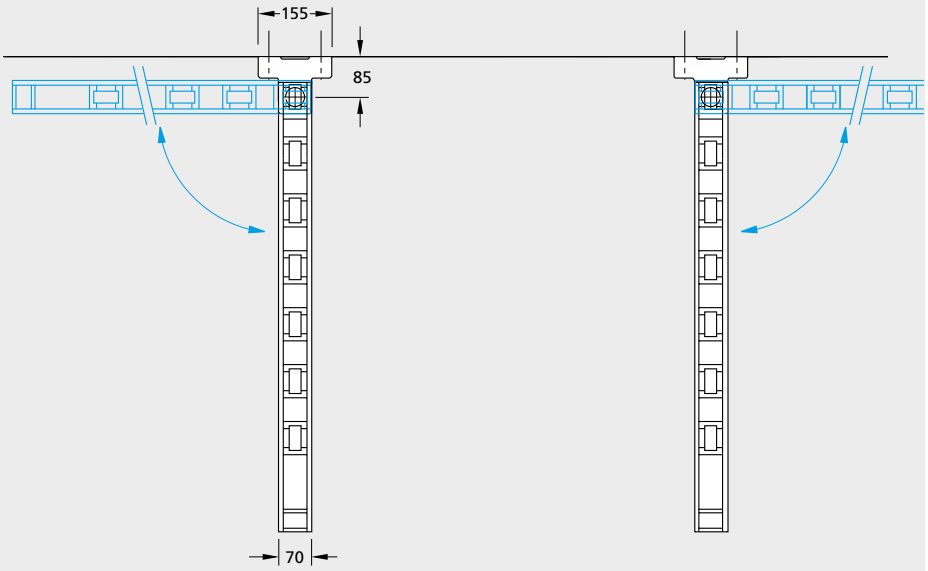

→ ROLLBLOC DIE LOADING ARMS WITH SPACE-SAVING ASYMMETRIC SWIVEL ACTION

ROLLBLOC Die Loading Arms CA 01/02

Swivel version, asymmetric

Fixed to the press table
With locking mechanism

Type list

Load bearing capacity	Length L	Attachment height A	Order code		Loading arm dimensions E	G min.	Hole pattern D min.	B
10 kN	500 mm	195 mm	CA01/0500	F	230	500	415	80
10 kN	800 mm	195 mm	CA01/0800	F	230	800	715	80
10 kN	1000 mm	245 mm	CA01/1000	F	280	1000	915	130
20 kN	500 mm	195 mm	CA02/0500	F	230	500	415	80
20 kN	800 mm	245 mm	CA02/0800	F	280	800	715	130
20 kN	1000 mm	295 mm	CA02/1000	F	330	1000	915	180

See fold-in flap on Page 28 for supplementary order designation 1

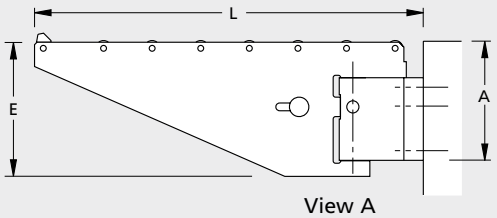

View A

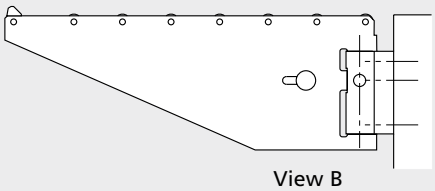

View B

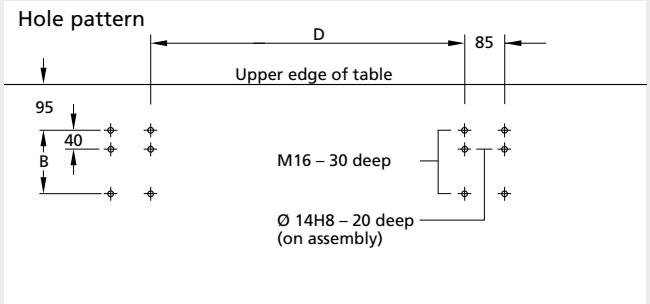

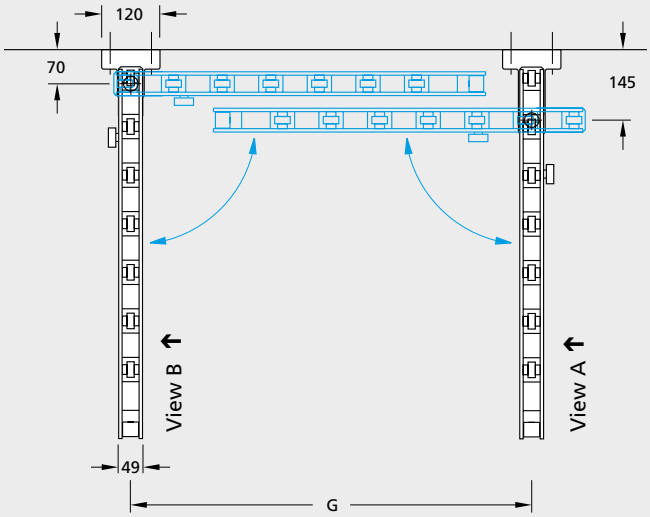

➔FOR FIXED MOUNTING TO THE PRESS TABLE

ROLLBLOC Die Loading Arms CA 04/06

Swivel version, asymmetric

Fixed to the press table
With locking mechanism

Type list

Load bearing capacity	Length L	Attachment height A	Order code			Loading arm dimensions E	G min.		Hole pattern D min.	B	
40 kN	800 mm	345 mm	CA 04/0800	F		400	780		670	315	
40 kN	1000 mm	395 mm	CA 04/1000	F		450	980		870	365	
40 kN	1250 mm	445 mm	CA 04/1250	F		500	1230		1120	415	
60 kN	800 mm	445 mm	CA 06/0800	F		500	780		670	415	
60 kN	1000 mm	525 mm	CA 06/1000	F		580	980		870	495	
60 kN	1250 mm	625 mm	CA 06/1250	F		680	1230		1120	595	

See fold-in flap on Page 28 for supplementary order designation 1

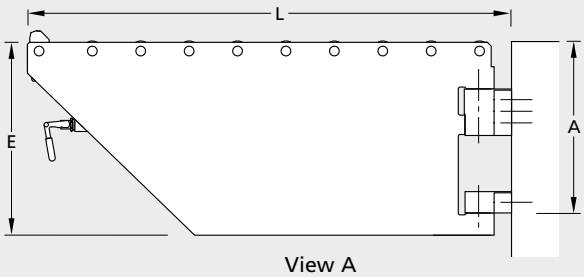

View A

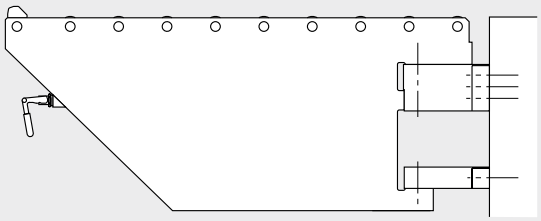
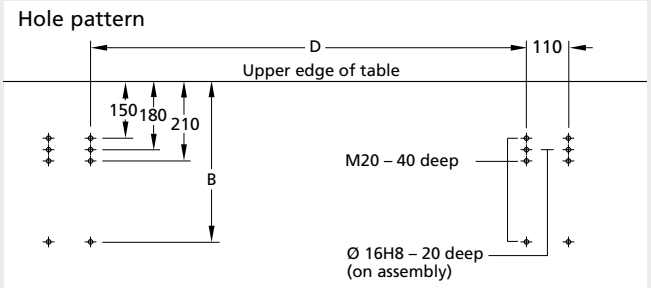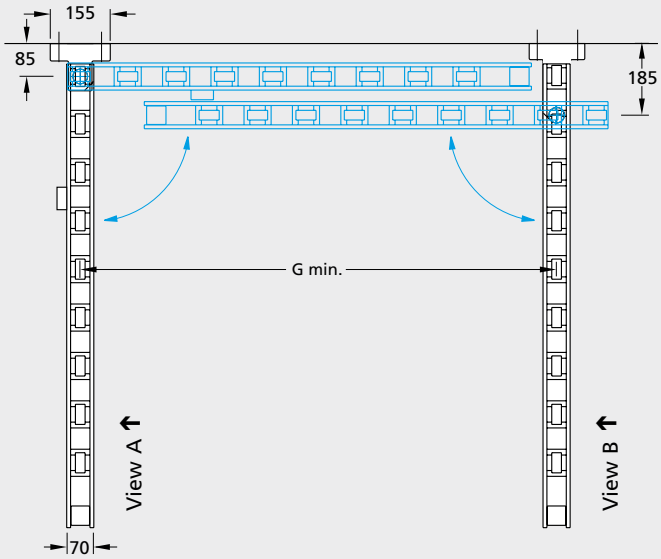
View B